

BERENDS S-TINE CULTIVATORS

STANDARD MODEL

- Multi purpose implement for breaking up and renovating pastures, preparing seedbeds and cultivating etc.
- 100mm tine spacing with working centres fitted on 4 bars giving a 300mm clearance between tines
- Tines can be moved along the frame for row crop work
- Headstock can be offset for working under vines and trees etc.



| CODE | TINE | CUT | WEIGHT | OPTIONAL CRUMBLERS | |
|------|-------------------------------------|------|--------|--------------------|--------|
| | | | | CODE | WEIGHT |
| 0311 | 12 | 1.2m | 118kg | 0235 | 75kg |
| 0312 | 16 | 1.6m | 154kg | 0236 | 85kg |
| 0313 | 20 | 2.0m | 172kg | 0237 | 95kg |
| 0314 | 24 | 2.4m | 199kg | 0238 | 100kg |
| 0315 | 28 | 2.8m | 206kg | 0239 | 120kg |
| 0316 | 32 | 3.2m | 233kg | 0240 | 130kg |
| 0317 | 36 | 3.6m | 260kg | 0241 | 140kg |
| 0220 | Wheel kit to suit 12-28 tine models | | | | |
| 0230 | Wheel kit to suit 32-36 tine models | | | | |

FARM-AID STICK RAKES

- 3pt linkage
- 70x50 RHS main frame
- Anti-kick bar fitted for greater strength and minimised tine breakage
- ¾" spring steel round curved tines
- Tines spaced 6" apart - other spacings available



| FA199 | FA200 | FA201 | FA202 | FA203 | FA204 |
|-------|-------|-------|-------|-------|-------|
| 3' | 4' | 6' | 8' | 10' | 12' |

LINKAGE OFFSET DISC CULTIVATORS

JARRETT MEDIUM DUTY

- 3pt linkage disc cultivator with scalloped discs ideal for orchard and vegetable farming
- Spring mounted headstock to absorb shock loadings
- 65x65x10mm mitred angle steel main frame
- Self-aligning triple sealed ball bearings, mounted inside a spherically machined cast housing
- 28mm square, high strength Durax axles



| CODE | CUT | SIZE | MIN.PWR | WEIGHT | OPTIONAL FRONT SCRAPERS |
|---------------|------|-------|---------|--------|-------------------------|
| BS1218 | 4'6" | 12x18 | 25hp | 312kg | 22130 |
| BS1418 | 5'3" | 14x18 | 35hp | 366kg | 22131 |
| BS1618 | 6'0" | 16x18 | 45hp | 398kg | 22132 |
| BS1220 | 4'6" | 12x20 | 25hp | 320kg | 22130 |
| BS1420 | 5'3" | 14x20 | 35hp | 374kg | 22131 |
| BS1620 | 6'0" | 16x20 | 45hp | 406kg | 22132 |

JARRETT HEAVY DUTY

- 3pt linkage disc cultivator with scalloped discs ideal for general farming, weed control and fire breaks
- 65x65x10mm twin angle steel main frame with solid steel backstays
- Gang angle adjustment for tillage control
- Self-aligning triple sealed ball bearings, mounted inside a spherically machined cast housing
- 28mm square, high strength Durax axles




| CODE | CUT | SIZE | MIN. PWR | WEIGHT | OPTIONAL SCRAPERS |
|---------------|------|-------|----------|--------|-------------------|
| CS1420 | 5'3" | 14x20 | 40hp | 500kg | 22232 |
| CS1620 | 6'0" | 16x20 | 50hp | 550kg | 22233 |
| CS1820 | 6'9" | 18x20 | 60hp | 630kg | 22234 |
| CS2020 | 7'6" | 20x20 | 70hp | 690kg | 22235 |
| CS1422 | 5'3" | 14x22 | 40hp | 506kg | 22232 |
| CS1622 | 6'0" | 16x22 | 50hp | 556kg | 22233 |
| CS1822 | 6'9" | 18x22 | 60hp | 645kg | 22234 |
| CS2022 | 7'6" | 20x22 | 70hp | 706kg | 22235 |
| CS1824 | 6'9" | 18x24 | 60hp | 660kg | 22234 |
| CS2024 | 7'6" | 20x24 | 70hp | 720kg | 22235 |

LINKAGE OFFSET DISC CULTIVATORS

BERENDS

Designed for years of hard work with minimum maintenance.

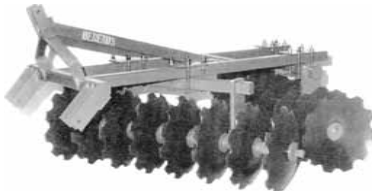

| CODE | DISCS | DISC SIZE | CUT | POWER GUIDE | WEIGHT |
|------|-------|-----------|------|-------------|--------|
| 0247 | 10 | 18" | 3'9" | 30hp | 340kg |
| 0248 | 12 | 20" | 4'6" | 36hp | 380kg |
| 0249 | 14 | 22" | 5'3" | 42hp | 400kg |
| 0250 | 16 | 22" | 6'0" | 48hp | 430kg |
| 0252 | 18 | 22" | 6'9" | 54hp | 480kg |

JARRETT TRAILED OFFSET DISC CULTIVATORS

A heavy duty trailed wheeled cultivator ideal for all types of tillage work including soil conditioning, fallow ploughing and stubble mulching. Features include:

- Travel Levelling Cylinder now standard
- Robust design with built-in weight
- 100x100x12mm twin angle steel main frame
- 100x100x12mm angle steel beam frame
- 610x6mm scalloped discs
- 38mm square high strength S1045 grade steel axles
- Self-aligning triple sealed ball bearings
- Hydraulic wheel lift



| CODE | DISCS | CUT | WEIGHT | OPTIONAL SCRAPERS |
|--------|-------|-------|----------|-------------------|
| TD1624 | 16 | 6'0" | (1600kg) | 23230 |
| TD1824 | 18 | 6'9" | (1700kg) | 23231 |
| TD2024 | 20 | 7'6" | (1800kg) | 23232 |
| TD2224 | 22 | 8'3" | (1900kg) | 23233 |
| TD2424 | 24 | 9'0" | (2000kg) | 23234 |
| TD2624 | 26 | 9'9" | (2100kg) | 23235 |
| TD2824 | 28 | 10'6" | (2200kg) | 23236 |